

Verifying PRAM Consistency over Read/Write Traces of Data Replicas

Hengfeng Wei^{1,2}, Yu Huang^{1,2*}, Jiannong Cao³, Xiaoxing Ma^{1,2}, Jian Lu^{1,2}

¹State Key Laboratory for Novel Software Technology
Nanjing University, Nanjing 210046, China

²Department of Computer Science and Technology
Nanjing University, Nanjing 210046, China

hengxin0912@gmail.com, {yuhuang, xxm, lj}@nju.edu.cn

³Internet and Mobile Computing Lab, Department of Computing
Hong Kong Polytechnic University, Hong Kong, China
csjcao@comp.polyu.edu.hk

Abstract

Data replication technologies enable efficient and highly-available data access, thus gaining more and more interests in both the academia and the industry. However, data replication introduces the problem of data consistency. Strong consistency conditions, such as linearizability and sequential consistency, are expensive to guarantee. Hence researchers have proposed weak consistency conditions, to enable tradeoffs between data access cost and data consistency. In this work, we focus on PRAM consistency. PRAM consistency is weak in that it does not require all the processes to agree on the same view of the order in which the data operations occur. To determine whether data replication systems indeed provide PRAM consistency, we work on the problem of *verifying PRAM consistency over Read/Write traces*. We first propose the RW-Closure algorithm, which models replica Read/Write operations as graph nodes, and ordering relations between operations as directed edges. PRAM consistency conditions can then be captured by three rules of iteratively adding edges to the transitive closure of the graph. The worst-case complexity of the RW-Closure algorithm is $O(n^5)$, where n is the total number of operations in the Read/Write trace. We then propose the Read-Centric algorithm, which reduces the complexity to $O(n^4)$. It restricts the applications of the three rules in a *Read*-induced subgraph and manages them in topological order, utilizing the fact that all *Reads* are on the one process as required in PRAM consistency. The experimental evaluation shows the efficiency and the scalability of the two proposed algorithms.

Keywords: Consistency, PRAM, Replication, Verification

1 Introduction

Data replication consists of maintaining multiple copies of critical data, called replicas, on separate computing entities. It is a critical enabling technology in distributed systems, improving both system reliability and performance [11, 9, 25, 3]. System reliability is improved by allowing access to the data even when some of the replicas are unavailable. Performance improvements concern reduced latency, by letting users access nearby replicas, and increased throughput, by letting multiple entities serve the data.

*Corresponding author.

For a data replication system to work in practice, it should have three desirable features, namely *consistency* (C), *availability* (A), and *partition tolerance* (P) [6]. Specifically, consistency is equivalent to having a single (emulated) up-to-date copy of the data. Availability informally refers to the property that each request eventually receives a response. Meanwhile, a system can be unreliable in many ways, e.g. crash failure, message loss, broken communication and malicious attacks. Data replicas can then be partitioned into several isolated groups. It is desirable for the system to tolerate such partitions [6, 7, 14].

Unfortunately, a data replication system cannot have all the three desirable features simultaneously [6, 13]. This impossibility result, known as the CAP theorem, leads to multiple balance options among consistency, availability, and partition tolerance. For modern data replication systems, commonly distributed over a wide area network, partition tolerance is a must [7, 14]. Moreover, both the data storage service providers and their customers prefer high data availability, for the commercial reasons and an “always-on” user experience [11, 9, 25]. Therefore, the reality forces us to trade consistency for availability and partition tolerance in many data replication systems.

Researchers have developed many levels of consistency conditions to meet various requirements of data replication systems. Strong consistency, such as linearizability [18] or sequential consistency [4] imposes very strict requirements on Read/Write operations. Data replication systems with strong consistency may require a high-cost implementation and result in unacceptable access latency. Weak consistency conditions [22, 2, 24, 25] provide alternatives to relax the strict requirements and allow more efficient implementations. For example, Yahoo!’s PNUTS [9] chooses to provide the *per-record* timeline consistency. Amazon’s Dynamo [11] only promises eventual consistency. Nowadays, the weak consistency is playing a more and more important role, with the prevalence of cloud data storage services, mobile devices, and wireless communications.

In this work, we focus on PRAM consistency [22], one of the well-known weak consistency conditions. Informally, a Read/Write trace is conformed with PRAM consistency if and only if *Write* operations performed by a single process are observed by all the other processes in program order. PRAM consistency is weak in the sense that it does not require all the processes to agree on the same view of the order in which operations occur [3]. To illustrate its practical usefulness, let us consider the *photo sharing application* described in [9]. In this application, users are allowed to post photos with their own preferences of photo access control. Now imagine that Alice wishes to share some photos with her close friends but not with her mother. She does a sequence of two updates to her record: adds her friends to and removes her mother from the photo access list, and then posts the photos. Under PRAM consistency condition, the two updates are guaranteed to be performed by any other processes in the order they are submitted.

Different protocols can be designed to guarantee PRAM consistency. However, it is notoriously difficult to prove the correctness of such protocols. One important complementary approach is to verify whether the Read/Write traces of data replicas satisfy PRAM consistency. Though PRAM consistency is regarded useful, to the best of our knowledge, its verification problem has not been addressed yet. In this work, we address the problem of *verifying PRAM consistency over Read/Write traces*. Specifically,

- We first propose the RW-Closure algorithm, which models replica Read/Write operations as graph nodes, and ordering relations between operations as directed edges. PRAM consistency can then be captured by three rules of iteratively adding edges to the transitive closure of the graph. Its worst-case complexity is in $O(n^5)$, where n is the number of operations in the trace.
- We then propose the Read-Centric algorithm with time complexity $O(n^4)$. It restricts the

applications of the three rules in a *Read*-induced subgraph and manages them in topological order, utilizing the fact that all *Reads* are on the one process as required in PRAM consistency.

- Experiments are conducted to show the efficiency and scalability of the proposed two algorithms.

The rest of the paper is organized as follows. Section 2 discusses the related work. Section 3 defines the problem of verifying PRAM consistency over Read/Write traces of data replicas. Section 4 and Section 5 propose the RW-Closure algorithm and the Read-Centric algorithm respectively. Section 6 presents the performance evaluation. Section 7 concludes the paper with a brief summary and future work.

2 Related Work

Data replication technique poses a great challenge for maintaining consistency among different replicas. Many different levels of consistency conditions have been proposed, ranging from strong consistency such as linearizability [18] and sequential consistency [4, 21] to the weaker ones such as PRAM consistency [22], causal consistency [2], and eventual consistency [25]. Much effort has been made to discuss the relationship among different consistency conditions [24, 16]. Specifically, Steinke and Nutt [24] first identify a set of four consistency properties, and then reinterpret the existing consistency conditions as a combination of any subset of them. In this way, they establish a lattice structure of consistency conditions. Halder and Vidyasankar [16] identify five different types of “recentness” of the value a *Read* could return and use them to define five *Read* illegalities. The consistency conditions are then reinterpreted in terms of the presence or absence of these *Read* illegalities.

Another related work is the verification problem with respect to other consistency conditions. Given a trace of data replicas (or, in other words, an execution of shared memory systems) and a specific consistency condition, the verification problem is to check whether the trace (or, execution) satisfies the consistency condition. In their seminal work, Gibbons and Korach [12] defines the *verifying sequential consistency* (VSC) and the *verifying linearizability* (VL) problems. Both problems are proved to be NP-Complete in general. They also systematically study many variants of the two problems and provide a collection of complexity results. For example, the VSC problem is NP-Complete even when the number of shared variables is bounded. Cantin et al. [8] focus on the *verifying memory coherence problem* (VMC). Similarly, the problem is proved to be NP-Complete and is also analyzed under some important restrictions, for example, on the number of operations per process or on the number of *Writes* of each value. Golab et al. [15] address the *verification problems with respect to safety, atomicity, regularity, and sequential consistency*. More importantly, they provide other aspects for such verification problem. First, they consider how to detect a consistency violation *as soon as one happens* by means of an online algorithm. Second, they further consider how to *quantify* the severity of the violations by means of the staleness of the *Reads* and the commonality of violations. Our work in this paper will investigate the *verification problem with respect to PRAM consistency* (VPC), one of the weak consistency conditions. Though PRAM consistency is regarded useful, to the best of our knowledge, its verification problem has not been addressed yet.

In the context of shared memory multiprocessor, some relaxed memory consistency conditions have been studied in [17, 23, 5]. Specifically, Hangal et al. [17] develop TSOtool to analyze the traces of programs against TSO (Total Store Order) model (VTSO). The time complexity of their algorithm is in $O(n^5)$, where n is the number of instructions in the program. Roy et al. [23] deal with the VTSO problem and present a fully parallelized algorithm with $O(n^4)$ time complexity.

Baswana et al. [5] identify a graph problem called implied-set-closure (ISC) as the abstraction of the bottleneck of the VTSO problem, and reduce the time complexity to $O(n^3)$. However, all the above algorithms only do approximate checking because the problem itself is NP-Complete. In contrast, our work in this paper focuses on PRAM consistency. PRAM consistency is one of the well-known weak consistency conditions in the sense that it does not require all the processes (processors) to agree on the same view of the order in which operations (instructions) occur [3]. Though inspired by [23], we prove that the VPC problem with multiple shared variables and unique *Write* values can be solved in polynomial time by proposing two polynomial algorithms.

3 Problem Definition

In this section, we first define the Read/Write trace of data replicas and PRAM consistency, and then define the problem of verifying PRAM consistency over the Read/Write trace.

3.1 Read/Write Trace

We model the data replication system as a collection of processes, and the data replicas as a collection of Read/Write shared variables.

Definition 3.1 (Operation (o))

An operation o is a tuple (t, p, v, d) where,

- $t \in \{R, W\}$ is the type of operation (R for *Read* and W for *Write*). Each operation is completed in the sense that a *Read* has returned its value or a *Write* has been applied and acknowledged;
- $p \in P$ is the id of process submitting the operation;
- $v \in V$ is the variable to which the operation is applied; and
- d is the value involved in the operation on variable v .

We assume that each process has at most one operation pending at a time. Furthermore, each operation is complete instantaneously.

We adopt the following notational conventions for operation $o = (t, p, v, d)$. The process is denoted by $p(o)$. The variable and the value involved are denoted by $var(o)$ and $val(o)$ respectively. Unless stated otherwise, we use o for any operation, r for any *Read*, w for any *Write*, O for the set of all operations, R for the set of all *Reads*, and W for the set of all *Writes*.

There are two basic partial orders between these operations. Program order, $\prec_{PO}$, is the order in which operations are conducted by each process.

Definition 3.2 (Program Order ($\prec_{PO}$))

$(o_1, o_2) \in \prec_{PO}$ if and only if $p(o_1) = p(o_2)$ and o_1 is completed before o_2 . We employ $\preceq_{PO}$ to denote the reflexive counterpart to $\prec_{PO}$.

Write-to order, $\prec_{WR}$ defines which *Write* is read by each *Read*.

Definition 3.3 (Write-to Order ($\prec_{WR}$))

$(o_1, o_2) \in \prec_{WR}$ if and only if $o_1 \in W \wedge o_2 \in R$, and $var(o_1) = var(o_2) \wedge val(o_1) = val(o_2)$.

We now define the Read/Write traces of data replicas as follows.

Definition 3.4 (Read/Write Trace (t))

A Read/Write trace t of data replicas is comprised of multiple process histories, each of which, in its own right, consisting of a finite sequence of *Read* and *Write* operations in program order.

In this work, we are concerned with some schedule (denoted π) of a collection of operations O which is a linear extension (denoted π_O) of all the operations with some predefined partial orders. Given a schedule of operations, the *preceding relation* between any two operations is denoted by ' $\prec$ '.

3.2 PRAM Consistency Condition

PRAM consistency condition is one of the well-known weak consistency conditions [22, 24]. It takes into account both program order and write-to order. Informally, a Read/Write trace is conformed with PRAM consistency if and only if *Write* operations performed by a single process are observed by all other processes in program order, whereas *Write* operations from different processes may be observed in different orders by different processes [24]. There are two key points to explain. On the one hand, PRAM consistency is weak in that it does not require all the processes to agree on the same view of the order in which operations occur [3]. It implies that each process can be checked against PRAM consistency separately. On the other hand, the operations visible to each process include only its own *Read* and all *Write* operations, while ignoring *Read* operations from other processes. It establishes an important fact that for process p , all the visible *Reads* are on the same process (i.e., p itself). It is worth noting that the fact is crucial for the design of the verification algorithms in Section 4 and Section 5. In the following, the set of visible operations for process p is denoted by $O_p = \{ o \mid (p(o) = p \wedge o \in R) \vee (o \in W) \}$.

With the explanations above, we can now rephrase PRAM consistency condition as follows: If, for any process p and its visible operations O_p , there exists a *legal* schedule of O_p , *respecting* both program order and write-to order, then the trace is regarded as PRAM consistent.

Here, the *legal* schedule requires that each *Read* reads the value from the latest preceding *Write* in the schedule. This is actually the fundamental correctness requirement for all consistency conditions [24, 3] and deserves a formal definition.

Definition 3.5 (Legal Schedule (LS))

A schedule of operations is *legal* if and only if each *Read* reads the value from the latest preceding *Write* in the schedule.

The predicate $LS(\pi)$ is evaluated true if and only if the schedule π is legal.

On the other hand, the notion of *respect* is formalized as follows.

Definition 3.6 (Respect Property)

A schedule π of a set of operations O is said to *respect* some partial order R (denoted π^R) if and only if the schedule is a *linearization* of the partial order. Formally,

$$\pi^R \iff \forall_{o_1, o_2 \in O} (R(o_1, o_2) \Rightarrow o_1 \prec o_2).$$

To sum up, the formal notion of PRAM consistency condition is as follows.

Definition 3.7 (PRAM Consistency Condition)

A Read/Write trace t satisfies PRAM consistency condition if and only if for any process p in the trace and its visible operations O_p , there exists a legal schedule of O_p , respecting both program order ($\prec_{PO}$) and write-to order ($\prec_{WR}$). Formally,

$$\forall_{p \in P} \exists_{\pi} (\pi_{O_p} \wedge LS(\pi) \wedge \pi^{\prec_{PO} \cup \prec_{WR}}).$$

	Multiple variables	Single variable
Write $\mathcal{D}$ uplicate values	VPC-MD (?)	VPC-SD (?)
Write $\mathcal{U}$ nique values	VPC-MU (P)	VPC-SU (P) [15]

Table 1: The variants and complexity issues of the VPC problem.

According to Definition 3.7, we can check each process against PRAM consistency separately. In the remainder of this paper, we thus focus on the verification problem with respect to some particular process and distinguish the process with p_0 .

3.3 The Problem of Verifying PRAM Consistency

In this section, we define the problem of verifying PRAM consistency over Read/Write traces as a decision problem.

Definition 3.8 (Verifying PRAM Consistency (VPC))

- **Instance:** A Read/Write trace t of data replicas. The size of t is defined as the total number of the operations in it and denoted by n .
- **Question:** Does t satisfy PRAM consistency?

Following the terminology in [12], we identify four variants of the general VPC problem from two orthogonal dimensions: *a)* whether there are multiple shared variables, *and b)* whether the *Write* operations are uniquely valued for each shared variable.

As stated in Table 1, the *VPC-SU* problem can be addressed in polynomial time, trivially following from [15]. In this paper, we focus on the VPC-MU problem: *verifying PRAM consistency over Read/Write traces under the assumption that there are multiple shared variables and the Write operations are uniquely valued for each shared variable*. In practice, the *Writes* can be tagged with a globally unique identifier, e.g., by combining its process id and its local index on process. Therefore, the latter assumption does not incur any loss of generality. Note that in the VPC-MU problem, for each *Read* operation r , there is at most one *Write* (denoted $D(r)$ for *dictating Write*) from which r reads the value.

To the best of our knowledge, the VPC-MU problem has not been addressed yet. In this paper, we demonstrate that it can be addressed in polynomial time by proposing two verification algorithms: the Read-Closure algorithm with $O(n^5)$ time complexity and the Read-Centric algorithm with $O(n^4)$ time complexity.

4 The RW-Closure Algorithm

In this section, we present the basic idea of the *RW-Closure* algorithm, its detailed design, an illustrating example, and more importantly its correctness proof.

4.1 Overview

The RW-Closure algorithm models the Read/Write trace as a directed graph with operations as nodes and ordering relations between operations as edges. PRAM consistency is captured by three kinds of edges. The RW-Closure algorithm keeps adding such edges until no more edges can be added. The trace t is regarded as PRAM consistent if and only if the resulting graph is acyclic (i.e., a DAG).

Specifically, at least two kinds of edges are necessary to meet the PRAM consistency: edges for program order and edges for write-to order. The third kind of edges can be derived from the *legal schedule* notion in Definition 3.5 [24, 23]. In a legal schedule, between each *Read* operation r on the variable v and its dictating *Write* $w = D(r)$, there cannot be any other *Write* (denoted w') on

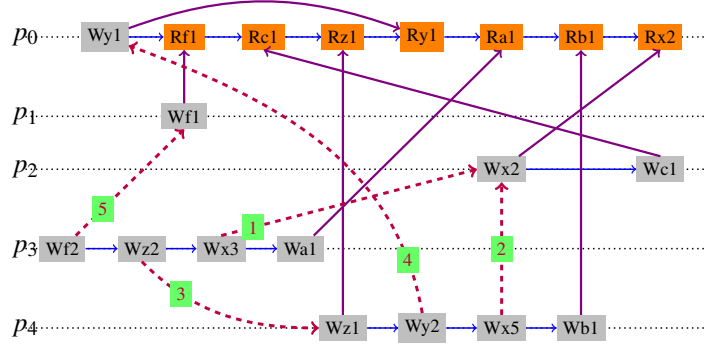


Figure 1: Illustration of the RW-Closure algorithm.

the same variable v . This observation results in two cases: 1) if $w' \prec r$ in advance, we have $w' \prec w$; and 2) if $w \prec w'$, we have $r \prec w'$.

To sum up, we get the following four rules for adding edges in $\mathcal{G}$.

1. **(Rule (a): program order)** For any pair of operations o_1 and o_2 , if $o_1 \prec_{PO} o_2$, then add an edge from o_1 to o_2 .
2. **(Rule (b): write-to order)** For any pair of operations w and r , if $w \prec_{WR} r$, then add an edge from w to r .
3. **(Rule (c): $w'wr$ order)** For any triple of operations w, r and w' , if $(w \prec_{WR} r) \wedge (var(w') = var(w)) \wedge (w' \prec r)$, then add an edge from w' to w , leading to $w' \prec_{W'W} w \prec_{WR} r$. Note that we denote the ordering relation between such w' and w by $\prec_{W'W}$.
4. **(Rule (d): wrw' order)** For any triple of operations w, r and w' , if $(w \prec_{WR} r) \wedge (var(w') = var(w)) \wedge (w \prec w')$, then add an edge from r to w' , leading to $w \prec_{WR} r \prec_{RW'} w'$. Note that we denote the ordering relation between such r and w' by $\prec_{RW'}$.

Note that we will show that the first three rules are sufficient for the VPC-MU problem in the following sections.

4.2 Detailed Design

As shown in Algorithm 1, program order and write-to order together lay a foundation for further edges to be added (Lines 1 - 6). To apply Rule (c), it is expected to first identify the triples conformed with it. To this end, the algorithm checks each *Read* (r) and its unique dictating *Write* (w) to find out all potential w' such that there is a path from w' to r (i.e., $w' \prec r$) (Lines 9 - 14). The reachability relation between w' and r can be computed in advance by transitive closure algorithms (Line 8) based on the $n \times n$ Boolean operation matrix (opMatrix). If any edges are added by Rule (c), new triples conformed with Rule (c) can emerge due to updated reachability relation. Therefore, the algorithm keeps applying Rule (c) and computing the transitive closure, until no more edges are added (Lines 15 - 17). Finally, it is claimed that the trace satisfies PRAM consistency if and only if the resulting graph $\mathcal{G}$ is acyclic (Line 20).

4.3 An Illustrating Example

Figure 1 shows a running example for the RW-Closure algorithm. The edges for program order and write-to order are denoted by solid lines. The edges added by Rule (c) are denoted by dashed

Algorithm 1: The RW-Closure algorithm.

Data: A Read/Write trace t .

Result: True, if t satisfies PRAM consistency; False, otherwise.

```
1 Step 1:
2 Apply Rule (a) to add “program order” edges;
3 Step 2:
4 Apply Rule (b) to add “write-to order” edges;
5 if some  $r$  has no dictating  $D(r)$  then
6   return false;
7 Step 3:
8 Compute the transitive closure of  $\mathcal{G}$ ;
9 Apply Rule (c) to add “ $w'wr$  order” edges;
10 foreach Read operation  $r$  do
11    $w \leftarrow D(r)$ ;
12   foreach  $w'$  s.t.  $opMatrix[w'] [r] = 1$  do
13     if  $var(w') = var(w) \wedge w' \neq$ 
14        $w \wedge opMatrix[w'] [w] = 0$  then
15        $opMatrix[w'] [w] \leftarrow 1$ ;
16 Step 4:
17 if any edges are added by Rule (c) then
18   Goto Step 3;
19 Step 5:
20 if  $\mathcal{G}$  is a DAG then return true;
21 else return false;
```

lines, with labels indicating the order they are added. For example, after the application of Rule (c) to $Wf2, Wy1$, and $Rf1$ (with label 4), the ensuing transitive closure algorithm identifies a path from $Wf2$ to $Rf1$ (via edges with label 3 and label 4), and in turn leads to another application of Rule (c) to $Wf2, Wf1$, and $Rf1$ (with label 5).

We can figure out a *legal schedule* of all the operations as a witness to PRAM consistency (Equation. 4.1). The specific schedule will be justified by the correctness proof of the Theorem 4.1 in Section 4.4. Note that the *Reads* are stressed in bold.

$$\begin{aligned} &Wf2, Wf1, Wz2, Wz1, Wy2, Wy1, \mathbf{Rf1}; \\ &Wx5, Wx3, Wx2, Wc1, \mathbf{Rc1}; \mathbf{Rz1}; \mathbf{Ry1}; \\ &Wa1, \mathbf{Ra1}; Wb1, \mathbf{Rb1}; \mathbf{Rx2}. \end{aligned} \tag{4.1}$$

4.4 Correctness Proof

If the resulting graph $\mathcal{G}$ from Algorithm 1 is a DAG, we expect to construct some *legal schedule* as a witness to PRAM consistency. To this end, we perform a *specific topological sorting* on $\mathcal{G}$ and prove that the resulting schedule (denoted $\pi_{\mathcal{G}}$) is legal. The topological sorting is conducted in line with the *Reads* on p_0 and is based on the following two definitions.

Definition 4.1 (r -downset ($r_{\Downarrow}$))

r -downset of a *Read* operation r is a set $r_{\Downarrow}$ of operations with the property that,

- $r \in r_{\Downarrow}$,
- $o \in r_{\Downarrow} \wedge o' \prec o \Rightarrow o' \in r_{\Downarrow}$.

Intuitively, r -downset consists of all the operations which must be scheduled before r , including r itself.

In the following, we assume that r' and r are two consecutive *Read* operations on p_0 with $r' \prec_{PO} r$. The r -delta concerns about the newly updated part of operations relative to r -downset.

Definition 4.2 (r -delta (r_δ))

r -delta of a *Read* operation r is a set r_δ of operations which equals the relative complement of $r'_\downarrow$ with respect to $r_\downarrow$ (i.e., $r_\downarrow \setminus r'_\downarrow$). For the first *Read* operation r , we have $r_\delta = r_\downarrow$.

In terms of $r_\downarrow$ and r_δ , the following definition describes the construction of $\pi_{\mathcal{G}}$.

Definition 4.3 (DAG-schedule ($\pi_{\mathcal{G}}$))

Given the DAG $\mathcal{G}$, the schedule $\pi_{\mathcal{G}}$ is constructed as follows:

- initialize $\pi_{\mathcal{G}}$ to be the empty sequence;
- for each *Read* operation r of process p_0 in program order, perform any topological sorting on r_δ and append the linear ordering of operations in r_δ to $\pi_{\mathcal{G}}$.

The example in Section 4.3 (Equation 4.1) shows an illustration of the DAG-schedule.

Theorem 4.1 (Correctness of the RW-Closure Algorithm)

The instance of VPC-MU problem satisfies PRAM consistency if and only if the RW-Closure algorithm terminates with a DAG $\mathcal{G}$. $\square$

Proof There are two directions to prove:

1. (“ $\Rightarrow$ ”) Prove by contradiction. If the resulting graph $\mathcal{G}$ is not a DAG, there exists some operation committing before itself. Contradiction; *and*
2. (“ $\Leftarrow$ ”) If the resulting graph $\mathcal{G}$ is acyclic, we prove that the schedule $\pi_{\mathcal{G}}$ constructed in Definition 4.3 is legal. This is shown as Lemma 4.1. $\blacksquare$

Lemma 4.1 (DAG-schedule is Legal)

If the resulting graph $\mathcal{G}$ of Algorithm 1 is acyclic, then the schedule $\pi_{\mathcal{G}}$ constructed in Definition 4.3 is legal. $\square$

Proof We prove this lemma by induction on the *Reads* of process p_0 in program order.

(I. *Base Case*) For the first *Read* operation $r = Rxd$, it is easy to check that (Figure 2 (1)):

- It is not the case that $Rxd \prec_{PO} Wxd$; *and*
- $w = Wxd$ is not overwritten by any other *Write* operations. Formally,

$$\forall_{w'} (var(w') = x \wedge w' \neq w \Rightarrow w' \prec w \prec_{WR} r).$$

Thus, we can perform any topological sorting conforming to DAG $r_\downarrow$ to get a legal schedule for the base case in the sense that Rxd reads the value from Wxd .

(II. *Induction Hypothesis*) Assuming that all of the first $(n-1)$ *Read* operations have been scheduled successfully, it remains to prove that the n^{th} *Read* operation (denoted $r = Rxd$) will be also scheduled successfully according to the DAG-schedule in Definition 4.3.

(III. *Induction Step*) Distinguish between two cases according to whether the dictating *Write* ($D(r)$) has been scheduled before. Note that we mark the previous *Read* operation as r' .

1) ($D(r) \notin r'_\downarrow$) Note that there is only one *Read* operation (i.e., Rxd) in r_δ . On the other hand, the *Write* operations in r_δ on other variables than x have no effect on the topological sorting which has been established until r' . The argument is therefore reduced to the base case and we can directly perform any topological sorting on r_δ and append it to the existing schedule.

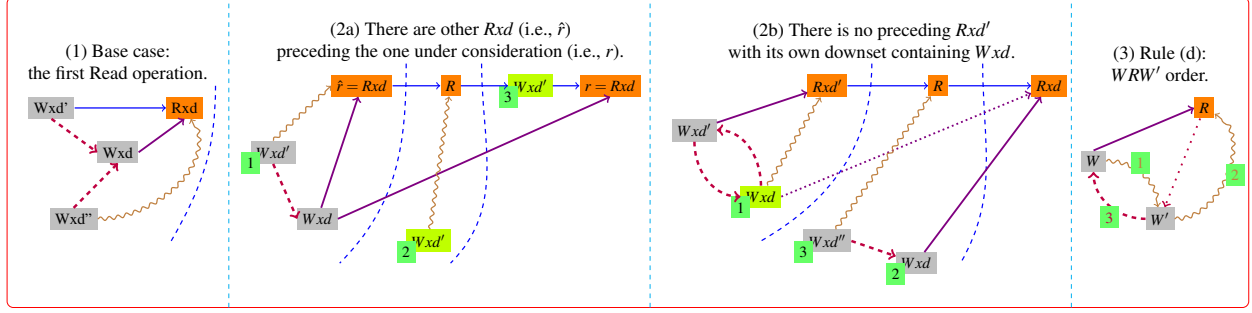


Figure 2: The correctness proof of the RW-Closure algorithm.

2) ($D(r) \in r'_\downarrow$) There are still two subcases to consider. In either case, it remains to show that r can be scheduled legally (Figure 2 (2a) and (2b)).

2.1) (There exists another Rxd preceding r on process p_0) Take the earliest Rxd and denote it by $\hat{r}$ (Figure 2 (2a)). We demonstrate that r (the n^{th} Read) can be scheduled legally. In the following, d , d' , and d'' are three different values.

- If $Wxd' \in \hat{r}_\downarrow$, then we have $Wxd' \prec_{W'W} Wxd \prec_{WR} \hat{r} \prec_{PO} r$ by induction hypothesis (Wxd' with label 1).
- If $Wxd' \notin \hat{r}_\downarrow$, then we have $Wxd' \notin r_\downarrow$. Otherwise, $Wxd' \prec r \Rightarrow Wxd' \prec_{W'W} Wxd \prec_{WR} \hat{r}$. Contradiction (Wxd' with label 2 and label 3).
- If $Wxd' \notin \hat{r}_\downarrow$, then Wxd' has no effect on the schedule of Rxd up to now.

In conclusion, we can perform any topological sorting on r_δ (actually, in this case, there is only one topological sorting on r_δ because all operations are on p_0) and append it to the existing schedule.

2.2) (There is no other Rxd preceding the n^{th} one on process p_0) In this case, we can conclude that there is no Rxd' such that $Rxd' \prec_{PO} Rxd \wedge Wxd \in Rxd'_\downarrow$ either (Figure 2 (2b)). Otherwise, there exists a cycle involving Wxd and Wxd' (Wxd with label 1) following from: a) $Wxd' \prec_{WR} Rxd' \prec_{PO} Rxd \Rightarrow Wxd' \prec_{W'W} Wxd$; and b) $Wxd \prec Rxd' \Rightarrow Wxd \prec_{W'W} Wxd'$. Therefore, Wxd will not be overwritten by the similar argument in Case 2.1) (Wxd with label 2 and Wxd'' with label 3).

Therefore, we can perform any topological sorting on r_δ and append it to the existing schedule. ■

As mentioned in Section 4.1, Rule (d) (i.e., wrw' order) is not necessary for the VPC-MU problem. We now explain this point more directly. In Figure 2 (3), R, W, W' are all on the same variable. R reads the value from W and W precedes W' . It is expected to show that the application of Rule (d) to W, R , and W' is dispensable in the sense of cycle detection. First, it is necessary for $W' \prec R$ (edge with label 2) to close the cycle involving $R \rightarrow W'$. Consequently, $W' \prec_{W'W} W$ (edge with label 3), due to Rule (c), closes another cycle together with $W \prec W'$ (edge with label 1).

4.5 Time and Space Complexity

The worst-case time complexity of the RW-Closure algorithm is dominated by the cost for Step 3 (Lines 7 - 14 in Algorithm 1). The transitive closure of $\mathcal{G}$ (Line 8) can be computed in $\Theta(n^3)$ time by the Floyd-Warshall's algorithm [10]. Rule (c) calls for the exploration of relation like $w' \prec r$

(Line 12). It costs $O(n^2)$ to examine all the potential pairs of nodes. The iteration over Step 3 and Step 4 may loop at most $O(n^2)$ times, adding one edge by Rule (c) in each iteration. In total, the worst-case time complexity of the RW-Closure algorithm is in $O(n^5)$.

Clearly, the space complexity of the RW-Closure algorithm is in $\Theta(n^2)$, resulting from the Boolean operation matrix (opMatrix).

5 The Read-Centric Algorithm

In this section, we propose the Read-Centric algorithm, including an overview, its detailed design, correctness proof, and complexity analysis.

5.1 Overview

Basically, for any consistency condition, the violation cannot be revealed without *Read* operations. For the problem of verifying PRAM consistency, all the *Read* operations under consideration are on the same process (i.e., p_0). The Read-Centric algorithm examines the *Read* operations one by one in program order and tries to construct *legal schedule* for each one. If the algorithm gets through all the *Read* operations, it is claimed that the trace satisfies PRAM consistency. Otherwise, the algorithm aborts with cycle detection, indicating a violation of PRAM consistency. The basic idea is sketched in Algorithm 2 (Lines 6 - 11). Note that we have ruled out the trivial cases of violations of PRAM consistency (Lines 4 - 5): *a*) some *Read* operation r has no dictating *Write*; or *b*) r comes before $D(r)$ in program order.

Algorithm 2: The Read-Centric algorithm (basic idea).

Data: A trace t .

Result: True, if t satisfies PRAM consistency; False, otherwise.

<pre> 1 Preprocessing: 2 apply Rule (a) to add “program order” edges; 3 apply Rule (b) to add “write-to order” edges; 4 if $\exists r$. (having no $D(r)$ or $r \prec_{PO} D(r)$) then 5 return false; </pre>	<pre> 6 foreach Read operation r in program order do 7 mark its previous <i>Read</i> operation r'; 8 Call compute_activeWrites(r, r') in Alg. 3; 9 cycle $\leftarrow$ Call schedule($r_{\downarrow}$) in Alg. 4; 10 if cycle then return false; 11 return true; </pre>
--	---

Specifically, for each *Read* operation r , it is desirable to construct some legal schedule of the operations in $r_{\downarrow}$ (Definition 4.1) so that r can read value from its dictating *Write*. In the legal schedule, some *Writes* are overwritten and cannot be read again. The algorithm dynamically maintains a global data structure to keep record of the possible values for each variable, namely *GlobalActiveWrites* (denoted $W_{\mathcal{A}}$). The computation of $W_{\mathcal{A}}$ (*compute_activeWrites* in Algorithm 3) is carried out with respect to the newly added operations in r_{δ} (Line 8) and will be discussed in detail in Section 5.2.1.

Upon each *Read* r , r must read the value from its dictating *Write* $D(r)$. This observation plays an important role in the schedule of $r_{\downarrow}$ (Line 9). In principle, the *schedule* subroutine consists of a series of applications of Rule (c). It behaves in a similar way to that of Step 3 in the RW-Closure algorithm (Lines 7 - 14 in Algorithm 1). The major differences between them are twofold. First, the *schedule* subroutine focuses on $r_{\downarrow}$ for each r , instead of the whole trace. Second, the applications of Rule (c) in *schedule* are carried out in topological order on the $r_{\downarrow}$ -induced subgraph, resulting in a more efficient algorithm. The detailed design of *schedule* will be discussed in Section 5.2.2 and its complexity analysis is given in Section 5.5.

The *schedule* mentioned above does not necessarily succeed. It may abort with *cycle detection* (Line 10), indicating the violation of PRAM consistency. A cycle may appear due to the application of Rule (c). The key point here is how to dynamically detect a cycle when it appears. This topic will be discussed in Section 5.2.3.

In summary, the Read-Centric algorithm has two major advantages over the RW-Closure algorithm. First, it carries out the applications of Rule (c) in some specific order, thus reducing the time complexity to $O(n^4)$, in contrast to $O(n^5)$ for the RW-Closure algorithm. Second, it behaves in a somewhat incremental fashion. It is able to locate the violation of PRAM consistency at the earliest *Read*.

5.2 Detailed Design

In this section, we explore in depth the three essential subroutines in the Read-Centric algorithm, namely *compute_activeWrites*, *schedule*, and *cycle detection*.

5.2.1 How to compute the GlobalActiveWrites incrementally

The data structure *GlobalActiveWrites* keeps record of the possible *Writes* to read from for each variable.

Definition 5.1 (GlobalActiveWrites ($W_{\mathcal{A}}$))

GlobalActiveWrites $W_{\mathcal{A}}$ is a set of key-value mappings, each of which has the form of:

$$f : \langle v \in V, W_v^{\mathcal{A}} \in 2^{W_v} \rangle,$$

where W_v stands for the set of *Write* operations on variable v :

$$W_v = \{ w \in W \mid \text{var}(w) = v \}.$$

The basic procedures on $W_{\mathcal{A}}$ are summarized in data structure *GlobalActiveWrites*. The Algorithm 3 (*compute_activeWrites*) investigates (not limited to) how to update $W_{\mathcal{A}}$ with respect to the newly added operations in r_{δ} .

We expect to identify which *Writes* should be overwritten by r_{δ} . A simple observation shows that all the operations in r_{δ} can be divided into two groups: *rr*-interval and *ww*-interval. Accordingly, Algorithm 3 examines each group to filter out the *Write* operations which should be overwritten. The *rr*-interval (Definition 5.2) consists of all the *Write* operations between r' and r (both exclusive). All the operations in $r'_{\downarrow}$ must be scheduled before those in the *rr*-interval (Lines 6 - 7). In contrast, the rest of operations in r_{δ} are in *ww*-interval (Definition 5.3).

Definition 5.2 (*rr*-interval (Itv_{rr}))

rr-interval for r is the set of operations between r' and r on process p_0 :

$$Itv_{rr} = \{ o \mid r' \prec_{PO} o \prec_{PO} r \}.$$

For the first *Read* r , its *rr*-interval consists of all the operations before it in program order.

Definition 5.3 (*ww*-interval (Itv_{ww}))

ww-interval for r is a set of operations:

$$Itv_{ww} = r_{\delta} \setminus Itv_{rr}.$$

Note that *ww*-interval is empty when $D(r)$ is also on p_0 (either $r' \prec_{PO} D(r) \prec_{PO} r$ or $D(r) \prec_{PO} r' \prec_{PO} r$). In the other case, *ww*-interval is not empty and all its operations must be scheduled after the latest *Write* on process $p(D(r))$ in $r'_{\downarrow}$ (denoted $w_{\hookrightarrow}$) (Lines 16 - 18 and Line 21).

Data Structure GlobalActiveWrites(W_A) Subroutine replaceWith(var, w) <i>replace active Writes on var with set $\{w\}$</i> $W_A[var] \leftarrow \{w\};$ Subroutine deactivateFrom(var, o) <i>deactivate latest Write of o on var</i> $W_A[var] \leftarrow W_A[var] \setminus o.W_\Sigma[var];$ Subroutine unionWith($vvmap$) <i>vvmap: a set of $\langle v \in V, w \in W \rangle$ mappings</i> $W_A \leftarrow W_A \cup vvmap;$ Data Structure LatestWrites(W_Σ). Subroutine updateLatestWrites($op, toOp$) <i>update $toOp.W_\Sigma$ depending on $op.W_\Sigma$</i> foreach $v \in V$ do if $toOp.W_\Sigma[v].wid < op.W_\Sigma[v].wid$ then $toOp.W_\Sigma[v] \leftarrow op.W_\Sigma[v];$ if $op \in W_\exists \wedge toOp.W_\Sigma[v].wid < op.wid$ then $toOp.W_\Sigma[var(op)] \leftarrow \{op\};$	Data Structure EarliestRead($r_{\ll}$). Subroutine initEarliestRead(o, r) <i>set the earliest Read reachable from o to r</i> $o.r_{\ll} \leftarrow r.id;$ Subroutine updateEarliestRead($src, sucs$) <i>update $r_{\ll}$ of src to the minimum in $sucs$;</i> <i>return old $r_{\ll}$ of src</i> $old \leftarrow src.r_{\ll};$ $src.r_{\ll} \leftarrow \min(src.r_{\ll}, \min_{o \in sucs} o.r_{\ll});$ return $old;$ Subroutine identifyWRPair(w', old) <i>old: the last $r_{\ll}$ of w' (w, r) to form $w'wr$</i> <i>triple for Rule (c)</i> $r \leftarrow$ the earliest Read such that $var(r) = var(w') \wedge r.id \in [w'.r_{\ll}, old)$ return $D(r);$
--	--

Algorithm 3: Computation of the GlobalActiveWrites (*compute_activeWrites*).

Data: Operations in r_δ .

Result: Update of data structures, including global W_A and $W_\Sigma, r_{\ll}$ for each operation.

1 (1) dealing with rr -interval: 2 $o_{pre} \leftarrow r'$; 3 foreach $w \in Itv_{rr}$ do 4 Call initEarliestRead(w, r); 5 Call updateLatestWrites(o_{pre}, w); 6 // deactivate some Writes 7 Call replaceWith($var(w), w$); 8 $o_{pre} \leftarrow w;$ 9 Call updateLatestWrites(o_{pre}, r);	10 (2) dealing with ww -interval: 11 $o_{pre} \leftarrow w_{\hookrightarrow};$ 12 Let $W_A \leftarrow$ initial copy of W_A ; 13 foreach $w \in Itv_{ww}$ do 14 Call initEarliestRead(w, r); 15 Call updateLatestWrites(o_{pre}, w); 16 // deactivate some Writes 17 Call deactivateFrom($var(w), w_{\hookrightarrow}$); 18 $W_A[v] \leftarrow \{w\};$ 19 $o_{pre} \leftarrow w;$ 20 Call updateLatestWrites(o_{pre}, r); 21 Call unionWith(W_A);
--	---

5.2.2 How to schedule operations in r -downset incrementally

Upon each *Read* r , r must read the value from its dictating *Write* $D(r)$. As a consequence, any other active *Writes* on variable $v = \text{var}(r)$ than $D(r)$ (i.e., $W_A[v] \setminus D(r)$) must be scheduled before $D(r)$ due to Rule (c). The dynamic adding of edges by Rule (c) may change the reachability relation among operations. Therefore, Rule (c) may apply again. The iteration repeats or aborts once a cycle is detected. In the following, we identify and discuss three major issues in *schedule* (Algorithm 4), all related to Rule (c).

1) *How to identify the triple $w'wr$ involved in Rule (c).* Owing to the uniqueness of *Writes*, we can focus on the reachability relation between pairs of w' and r . Moreover, all the *Reads* are on the same process. It is sufficient for any *Write* to keep record of the *earliest Read* reachable from itself.

Definition 5.4 (EarliestRead ($r_{\ll}$))

Assume that each *Read* is associated with its index (denoted id) on process p_0 and can be access by $R[id]$. The *EarliestRead* of an operation o , $o.r_{\ll}$, is the index of the earliest *Read* it can reach:

$$o.r_{\ll} = i \iff o \prec R[i] \wedge \nexists i' < i (o \prec R[i']).$$

The procedures on $r_{\ll}$ are summarized in data structure *EarliestRead*, including *initialization* (called in Line 4 and Line 14 in Algorithm 3) and *update*. The $r_{\ll}$ (denoted old) of some *Write* on variable v (denoted w') may be updated (to new) due to the applications of Rule (c). In other words, w' can now reach the *Reads* in $R[new \dots old]$, which is the set of *Reads* between $R[new]$ and $R[old - 1]$ (formally, $R[new \dots old] \equiv \{r \in R \mid R[new] \preceq_{PO} r \prec_{PO} R[old]\}$). If there are *Reads* on variable v in $R[new \dots old]$, new triples for Rule (c) involving w' can be identified. When there are more than one such *Reads*, the subroutine *identifyWRPair* (in data structure *EarliestRead*) always takes the earliest one. The correctness of this treatment is given in Lemma 5.2 (Section 5.4). Moreover, the treatment also plays an important role in the complexity analysis in Section 5.5.

2) *How to decide the w' parts of Rule (c).* Upon each *Read* r , the series of applications of Rule (c) in *schedule* seems to affect all the operations in $r_{\downarrow}$. However, we can decide in advance the *Writes* which may act as the w' parts of Rule (c). The key observation is that the update of $r_{\ll}$ of an operation only depends on its direct successors (subroutine *updateEarliestRead* in data structure *EarliestRead*). As we have mentioned, the *schedule* start with adding edges from the active *Writes* in $W_A[\text{var}(r)] \setminus D(r)$ to $D(r)$ (Lines 1 - 4 in Algorithm 4). Therefore, the operations which may act as r' of Rule (c) are restricted in the downset of $D(r)$. We summarize the above arguments in Lemma 5.1.

Lemma 5.1 (w' parts of Rule (c) in *schedule*)

Upon each *Read* r , the *Writes* which may act as w' parts of Rule (c) are restricted in $D(r)_{\downarrow}$. $\square$

Based on Lemma 5.1, the *schedule* can now focus on the operations in $D(r)_{\downarrow}$ (Lines 6 - 10 in Algorithm 4).

3) *How to manage the order of the applications of Rule (c).* There are two cases according to whether $D(r)$ is in $r'_{\downarrow}$. If $D(r) \notin r'_{\downarrow}$, no $r_{\ll}$ of the operations in $D(r)_{\downarrow}$ are updated after the applications of Rule (c) due to the fact that r reads the value from $D(r)$ (Lines 1 - 4 in Algorithm 4). Therefore, no more applications of Rule (c) occur (Line 5). In the following, we assume that $D(r) \in r'_{\downarrow}$ and show how to manage the order of the applications of Rule (c). Its correctness proof and time complexity analysis are given in Lemma 5.3 and Lemma 5.4 respectively.

Algorithm 4: Schedule.

Result: Schedule operations in $r_{\downarrow}$; return *true* once cycle appears; *false*, otherwise.

```
1  (1) start schedule with  $r$  reading from  $D(r)$       20 // Queue-based topological sorting
2  foreach  $w' \in W_{\mathcal{A}}[var(r)] \setminus \{D(r)\}$  do      21 while QZERO is not empty do
3  |   cycle  $\leftarrow$  Call applyRuleC( $w', D(r)$ );      22    $w' \leftarrow$  dequeue(QZERO);
4  |   if cycle then return true;                    23   if  $w' \in W \wedge w'.DONE = false$  then
5  if  $D(r) \notin r'_{\downarrow}$  then return false;           24   |   (cycle,  $w$ )  $\leftarrow$  Call checkRuleC( $w'$ );
6  (2) decide the  $w'$  parts of Rule (c) in schedule  25   |   if cycle then return true;
7  Let  $\mathcal{G} \leftarrow$  operation graph corresponding to  $r_{\downarrow}$ ; 26   |   //  $w$  is UNDONE as  $w'$  part of Rule (c)
8  Let  $\mathcal{G}^T \leftarrow$  transpose of  $\mathcal{G}$ ;                27   |   if  $w \neq null \wedge w \in D(r)_{\downarrow} \wedge (!w.DONE)$ 
9  Let  $D(r)_{\downarrow} \leftarrow$  downset of  $D(r)$ ;           28   |   then
10 Let  $\mathcal{G}_{D(r)_{\downarrow}}^T \leftarrow D(r)_{\downarrow}$ -induced subgraph of  $\mathcal{G}^T$ ; 29   |   |   insert  $w'$  into  $w$ .SUCLIST;
30                                     30   |   |   insert  $w$  into  $w'$ .PRELIST;
                                     31   |   |    $w'.COUNT \leftarrow w'.COUNT + 1$ ;
                                     32   |   |
11 (3) prepare for further schedule                33   |   // erase dependency and identify potential
12 traverse  $\mathcal{G}_{D(r)_{\downarrow}}^T$  to compute for each  $o \in D(r)_{\downarrow}$  34   |    $w'(s)$  of Rule (c)
13 (a) COUNT: number of direct predecessors        35   |   if  $w'.COUNT = 0$  then
14 (b) PRELIST: list of direct predecessors        36   |   |    $w'.DONE \leftarrow true$ ;
15 (c) SUCLIST: list of direct successors;         37   |   |   foreach  $s \in w'.SUCLIST$  do
                                     38   |   |   |    $s.COUNT \leftarrow s.COUNT - 1$ ;
                                     39   |   |   |   if  $s.COUNT = 0$  then
                                     40   |   |   |   |   enqueue(QZERO,  $s$ );
                                     41   |   |   |
16 (4) schedule, based on topological sorting      42   |   |   return false;
17 queue containing possible  $w'$  part of Rule (c) 43   |
18 Let QZERO  $\leftarrow$  empty queue;                44   |
19 enqueue(QZERO,  $D(r)$ );                          45   |
```

The basic idea is that we examine each operation in $D(r)_{\downarrow}$ acting as w' part of Rule (c) in topological order in $D(r)_{\downarrow}$ -induced subgraph (Line 10). Specifically, we choose the Queue-based topological sorting algorithm [19] because it can be easily adapted to handle the dynamically added edges due to Rule (c). In general, the Queue-based topological sorting, along with the applications of Rule (c), works as follows: it first puts the single source, $D(r)$, into the QZERO queue (Line 19). Then it repeatedly chooses a *Write* w' of in-degree 0 (Lines 22 - 23), checks Rule (c) involving w' (Lines 24 - 25), and erases the dependency relation toward its direct successors (Lines 31 - 37).

However, if the w' part and the w part of the added edge are both in $D(r)_{\downarrow}$ and w has not been marked DONE yet, it is necessary to examine w first before marking w' as DONE. This is implemented in the topological sorting framework by imposing dependency from w' to w and increasing the in-degree of w' (Lines 26 - 30).

Procedure checkRuleC(w').	Procedure applyRuleC(w', w)
Data: w' : <i>Write</i> acting as the w' part of Rule (c) Result: Check whether w' <i>really</i> acts as the w' part of Rule (c) and apply Rule (c) if it is true; return <i>true</i> if some cycle appears; otherwise return the w part involved in Rule (c)	Data: w', w : the w' and w parts of Rule (c) Result: apply Rule (c); return <i>true</i> if some cycle appears
<pre> 1 <i>old</i> ← Call updateEarliestRead($w', w'.PRELIST$); 2 w ← Call identifyWRPair(w', old); 3 if w is not null then 4 $cycle$ ← Call applyRuleC(w', w); 5 if $cycle$ then return true; 6 else return w; </pre>	<pre> 1 add edge from w' to w; 2 // cycle detection 3 v ← $var(w)$; 4 if $w'.W_\Sigma[v].wid \geq w.wid$ then 5 return true; 6 // update related data structures 7 Call updateEarliestRead($w', \{w\}$); 8 foreach $o \in \{o \mid w \preceq o \preceq cr\}$ do 9 Call deactivateFrom($var(o), w$); 10 Call updateLatestWrites(w', o); 11 return false; </pre>

5.2.3 How to determine the violation of PRAM consistency incrementally

The *schedule* subroutine does not necessarily succeed. It may abort with cycle detection (Line 4 and Line 25 in Algorithm 4). Cycle detection is an important step in the procedure *applyRuleC*, immediately following the identification of the triple of Rule (c) (Line 4 in procedure *checkRuleC*). In the following, we describe the principle of cycle detection and the related data structure.

Assume that Rule (c) is applied and an edge from the w' part to the w part is added. To close a cycle, we need to know the reachability relation from the w part to the w' part. Note that the w part of Rule (c) must be some *Write* having dictated *Reads* (for simplicity, we denote the set of such *Writes* by $W_\exists \equiv \{w \in W \mid \exists r \in R. w \prec_{WR} r\}$). Therefore, we can focus on the reachability relation between two operations in which the w part is in $W_\exists$. Furthermore, we can associate each *Write* in $W_\exists$ with an identifier (denoted *wid*) according to its dictated *Reads*. Formally, $w.wid \equiv \min(r.id \mid w \prec_{WR} r)$. The *wid* notion captures the basic idea that the *Reads* on the same variable can introduce order among their dictating *Writes*. In other words, for each variable v , the order of *Writes* on v in $W_\exists$ is determined by their earliest dictated *Reads*. Therefore, for each operation, we can further focus on the *latest Write* for each variable preceding it.

Definition 5.5 (LatestWrites (W_Σ))

For each operation o , its *LatestWrites* is a set of key-value mappings:

$$f : v \in V \mapsto w_\sigma \in W_\exists,$$

with the following conditions:

1. $var(w_\sigma) = v$;
2. $w_\sigma \prec o$;
3. for any other w'_σ satisfying 1) and 2), we have $w'_\sigma.wid < w_\sigma.wid$.

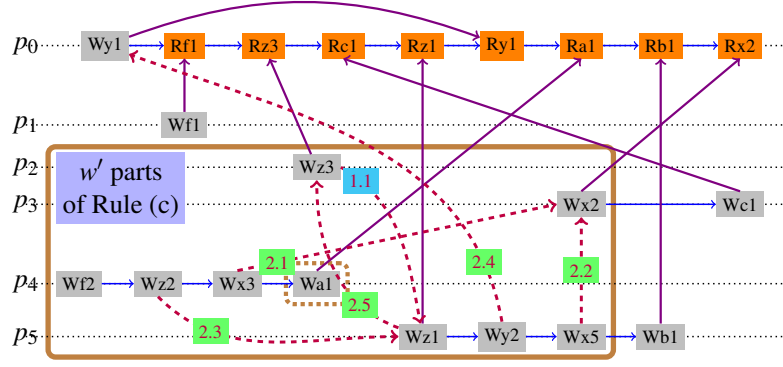


Figure 3: Illustration of *schedule* and *cycle detection*.

Note that the update of W_Σ of an operation only depends on its predecessor (data structure *LatestWrites*). Based on the data structure, the cycle detection amounts to checking the reachability relation from the w part to the w' part by comparison between two *wids* (Lines 2 - 5 in procedure *applyRuleC*).

5.3 An Illustrating Example

Figure 3 shows a running example of the Read-Centric algorithm, mainly concerning about the *schedule* and *cycle detection* subroutines. Note that the trace in Figure 3 is similar to that in Figure 1 used in Section 4.3.

Assume that $Rx2$ is now under consideration (i.e., $r = Rx2$ in Line 6 in Algorithm 2). Note that the edge from $Wz3$ to $Wz1$ (with label 1.1) has already been added due to $Rz1$. The *schedule* subroutine starts with adding the edge from $Wx3$ to $Wx2$ (with label 2.1) and the edge from $Wx5$ to $Wx2$ (with label 2.2) due to Rule (c) (Lines 1 - 4 in Algorithm 4). The rectangle area covers all the potential w' parts of Rule (c) (i.e., $Wx2_\downarrow$ in Lines 6 - 10). It is the case of $D(r) \in r'_\downarrow$ (i.e., $Wx2 \in Rb1_\downarrow$), so future *schedule* with the topological sorting framework is needed (Lines 16 - 38).

In the running example, $Wz2$ is chosen to be examined for the w' part of Rule (c) before $Wy2$ and $Wz1$, and the edge from $Wz2$ to $Wz1$ (with label 2.3) is added (in procedure *checkRuleC*). Since $Wz1$ is *UNDONE*, we have to examine $Wz1$ first before marking $Wz2$ *DONE*, by increasing the *COUNT* of $Wz2$ (Lines 26 - 30). According to the topological sorting, $Wy2$ is examined and the edge from $Wy2$ to $Wy1$ (with label 2.4) is added.

Then, it is $Wz1$'s turn. Since there is a path from $Wz1$ to $Rz3$ via the edge with label 2.4, Rule (c) can be applied and the edge from $Wz1$ to $Wz3$ (with label 2.5) is added, closing a cycle together with the edge from $Wz3$ to $Wz1$ (with label 1.1).

5.4 Correctness Proof

In this section, we prove the correctness of the Read-Centric algorithm, as stated in Theorem 5.1. To this end, we first justify the correctness of the *identifyWRPair* subroutine (Lemma 5.2) and the *schedule* subroutine (Lemma 5.3).

Lemma 5.2 (Correctness of *identifyWRPair*)

It is correct for the subroutine *identifyWRPair* (in data structure *EarliestRead*) to focus on the earliest Read with respect to the $w'wr$ order (in Rule (c)), in the sense that:

- the data structures *GlobalActiveWrites*, *EarliestRead*, and *LatestWrites* are updated correctly, and

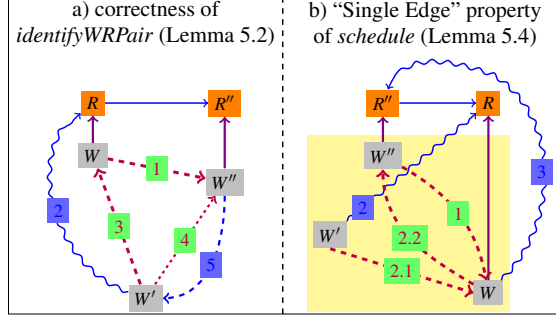


Figure 4: The correctness and time complexity of the Read-Centric algorithm.

- the cycle detection in procedure *applyRuleC* will not miss any cycle. $\square$

Proof The correctness proof is illustrated in Figure 4a, in which all operations perform on the same variable. Suppose that there exists a path from W' to R (with label 2). By Rule (c), the edge from W' to W (with label 3) and the edge from W' to W'' (with label 4) should be added. Nevertheless, the latter one is not necessary, as indicated in *identifyWRPair*:

- The program order between R and R'' implies the edge from W to W'' (with label 1). Thus, the missing of the edge from W' to W'' does not break the reachability relation from W' to W'' , resulting in no effect on the update of the data structures.
- Any cycle involving the (missing) edge from W' to W'' will be closed with the edge from W' to W and the edge from W to W'' . $\blacksquare$

The correctness of *schedule* follows from the above lemma.

Lemma 5.3 (Correctness of *schedule* (Algorithm 4))

Let r' and r be two consecutive Reads in program order, and suppose that r is under consideration in Algorithm 2 (Line 6). The *schedule* in Algorithm 4 is correct with respect to program order, write-to order, and $w'wr$ order, in the sense that *schedule* examines exactly all the three orders considered in the *RW-Closure* algorithm (Algorithm 1). $\square$

Proof It is trivially valid for program order and write-to order in that they are both static.

The set of the $w'wr$ triples examined in *schedule* is a subset of those considered in the *RW-Closure* algorithm. In principle, the *schedule* can examine all the possible $w'wr$ triples of Rule (c) based on the topological order described in *schedule*. Though some $w'wr$ triples are ignored in *identifyWRPair*, the correctness of *schedule* is still kept by Lemma 5.2. $\blacksquare$

The correctness of the Read-Centric algorithm can be proved by induction on the *Read* operations.

Theorem 5.1 (Correctness of the Read-Centric Algorithm)

The instance of VPC-MU problem satisfies PRAM consistency if and only if the Read-Centric algorithm (Algorithm 2) terminates with a DAG. $\square$

Proof By induction on the *Reads* in program order, together with Lemma 5.3 as the induction step, we can prove that the Read-Centric algorithm is equivalent to the *RW-Closure* algorithm (Algorithm 1) with respect to program order, write-to order, and $w'wr$ order. This completes the correctness proof by Theorem 4.1. $\blacksquare$

Data structure	Subroutine	Worst-case time complexity
GlobalActiveWrites($W_{\mathcal{A}}$)	replaceWith	$O(1)$
	deactivateFrom	$O(n)$
	unionWith	$O(n^2)$
EarliestRead($r_{\ll}$)	initEarliestRead	$O(1)$
	updateEarliestRead	$O(n)$
	identifyWRPair	$O(n)$
LatestWrites(W_{Σ})	updateLatestWrites	$O(V) = O(n)$

Table 2: The worst-case time complexity of subroutines in data structures.

5.5 Time and Space Complexity

The worst-case time complexity of the Read-Centric algorithm is dominated by the cost of *schedule*, which relies on Lemma 5.4. The cost for manipulating data structures is summarized in Table 2.

Lemma 5.4 (“Single Edge” property of *schedule* (Algorithm 4))

Upon each Read r , the subroutine *schedule* (Algorithm 4) adds at most one edge going out from each Write in $D(r)_{\downarrow}$. $\square$

Proof There are two possible cases for *schedule* to add the second edge going out from some Write w' in $D(r)_{\downarrow}$. The first case is concerned with the subroutine *identifyWRPair* and is dealt with in Lemma 5.2. The other case is concerned with the topological sorting framework. Specifically, an edge from w' to another Write w is added. The Write w is in $D(r)_{\downarrow}$ and has not been marked DONE yet (Line 26 in Algorithm 4). In this case, we prove by contradiction that no edges going out from w' can be added when w' is examined again (after w is marked DONE). Otherwise, we show that some cycle appears before w' is examined again. Figure 4b gives an illustration and all the operations perform on the same variable v .

Let $W'WR$ be the triple comforming with Rule (c). The edge from W' to W (with label 2.1) is added, and W is in $D(r)_{\downarrow}$ and has not been marked DONE yet. Assume that the second edge going out from w' will be added when w' is examined again. This assumption implies that the $r_{\ll}$ of w' is updated via W and a new Read R'' (on variable v) is now reachable. Thus, when W is examined, R'' is reachable from W (path with label 3), and the edge from W to W'' (with label 2.2) is added, closing a cycle with the edge from W'' to W (with label 1). The subroutine *schedule* aborts. Contradiction. $\blacksquare$

The overall worst-case time complexity is given in Theorem 5.2.

Theorem 5.2 (Time Complexity of the Read-Centric Algorithm)

The worst-case time complexity of the Read-Centric algorithm (Algorithm 2) is in $O(n^4)$, where n is the total number of operations. $\square$

Proof Suppose that Read r is under consideration and there are at worst n operations in $r_{\downarrow}$.

The worst-case time complexity of the subroutine *compute_activeWrites* is in $O(n^2)$ (Line 8). The worst-case time complexity of the subroutine *schedule* (Line 9) consists of four parts in Algorithm 4:

1. $O(n^3)$ for startup (Lines 1 - 4).
2. $O(n + m) = O(n^2)$ to decide the w' parts of Rule (c) (Lines 6 - 10), where m is the total number of edges.

3. $O(n + m) = O(n^2)$ for preparation (Lines 11 - 15).
4. $O(n + m) + O(n \cdot (n + m + n^2)) = O(n^3)$ to schedule (Lines 16 - 38), where the first term is for the topological sorting framework and the latter one is for the applications of Rule (c) in procedure *applyRuleC*, for at most n times by Lemma 5.4.

In summary, Algorithm 4 cost $O(n^3)$ in the worst case.


Therefore, the worst-case time complexity of the Read-Centric algorithm is in $O(n^4)$, for at most n iterations. ■

Clearly, the space complexity of the Read-Centric algorithm is in $O(1 \cdot n^2) + O(n \cdot 1) + O(n \cdot n) = O(n^2)$, consisting of the space for the global $W_{\mathcal{A}}$, $r_{\ll}$ for each operation, and W_{Σ} for each operation.

6 Performance Evaluation

The worst-case time complexity of the two algorithms given in Section 4.5 and Section 5.5 are both asymptotic. In this section, we further evaluate their performance by experiments.

6.1 Experiment Setup

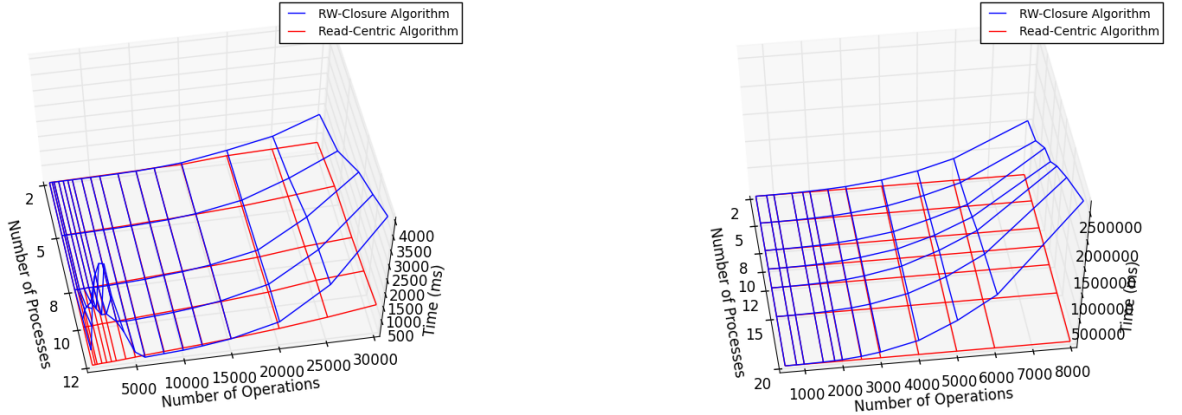

(a) Time cost of two verification algorithms over random traces.

(b) Time cost of two verification algorithms over valid traces.

Figure 5: Performance evaluation of two verification algorithms.

We carry out two groups of experiments. The first group of experiments are running on the random generated traces and the other group of experiments on the valid traces. Valid traces are known in advance to be PRAM consistent. Note that both algorithms running on valid traces have to access all the operations. For each group of experiments, both the number of processes and the number of operations are tunable to investigate their impacts on the time cost (in *ms*). The number of operations varies from 500 to 30000, while the number of processes varies from 2 to 20. In addition, we continue to increase the number of operations for the Read-Centric algorithm to justify its scalability when it costs too much for the RW-Closure algorithm in time. All the experiments are conducted on a machine with 3.40GHz CPU and 1280M RAM (virtual machine) running Win7 (64-bit).

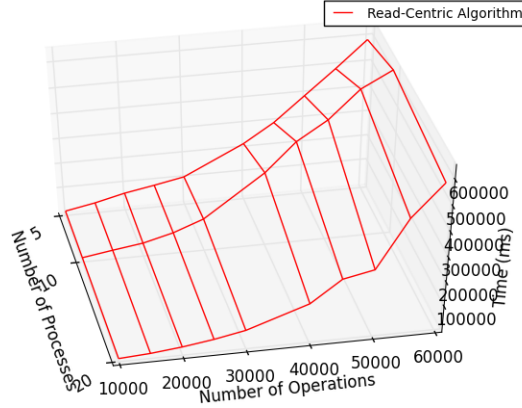


Figure 6: Time cost of the Read-Centric algorithm over valid traces.

6.2 Experimental Result

As shown in Figure 5, the Read-Centric algorithm outperforms the RW-Closure algorithm in time cost both over random traces and over valid traces. The more the operations are, the more significant the advantages become. Specifically, when both running on the valid traces, the Read-Centric algorithm performs more efficiently than the RW-Closure algorithm with at most 694X speedup over the valid trace with 20 processes and 8000 operations. In addition, we increase the number of operations to investigate the scalability of the Read-Centric algorithm. As shown in Figure 6, the Read-Centric algorithm can efficiently deal with the valid executions with 20 processes and up to 60000 operations (in less than 600s). In contrast, it takes the RW-Closure algorithm more than 3000s over the valid trace with 20 processes and 8000 operations. In summary, the above results justifies the scalability and thus practical importance of the Read-Centric algorithm.

7 Conclusion and Future Work

In this work, we have studied *the problem of verifying PRAM consistency over Read/Write traces with Multiple variables and Unique Write operations* (VPC-MU) and proposed two polynomial algorithms for it. The RW-Closure algorithm works with the worst-case time complexity $O(n^5)$, where n is the total number of operations in the Read/Write trace. The Read-Centric algorithm reduces its time complexity to $O(n^4)$.

In Section 3, we identify four variants of the problem of verifying PRAM consistency (VPC). We hope to address the complexity issues of other variants in future work, including the VPC-MD problem and the VPC-SD problem listed in Table 1. The verification problems with respect to other weak consistency conditions also deserve consideration, e.g., causal consistency [2]. Moreover, Golab et al. [15] introduce the useful notion of *quantifying the severity of the violations*. For weak consistency models, it is also desirable to define appropriate quantities for the severity of violations and design efficient algorithms to evaluate them.

Acknowledgments

This work is supported by the National Natural Science Foundation of China (No. 61272047, 61021062) and the National 973 Program of China (2009CB320702).

References

- [1] D. Agrawal, M. Choy, H. Va Leong, and A. K. Singh. Mixed consistency: a model for parallel programming (extended abstract). In *Proceedings of the thirteenth annual ACM symposium on Principles of distributed computing*, PODC'94, pages 101–110, New York, NY, USA, 1994. ACM.
- [2] M. Ahamad, G. Neiger, J. Burns, P. Kohli, and P. Hutto. Causal memory: definitions, implementation, and programming. *Distributed Computing*, 9:37–49, 1995.
- [3] H. Attiya and J. Welch. *Distributed computing: fundamentals, simulations and advanced topics*, volume 53. Wiley, 2004.
- [4] H. Attiya and J. L. Welch. Sequential consistency versus linearizability. *ACM Trans. Comput. Syst.*, 12(2):91–122, May 1994.
- [5] S. Baswana, S. Mehta, and V. Powar. Implied set closure and its application to memory consistency verification. In A. Gupta and S. Malik, editors, *Computer Aided Verification*, volume 5123 of *Lecture Notes in Computer Science*, pages 94–106. Springer Berlin Heidelberg, 2008.
- [6] E. Brewer. Towards robust distributed systems. In *Proceedings of the Annual ACM Symposium on Principles of Distributed Computing*, volume 19, pages 7–10, 2000.
- [7] E. Brewer. Cap twelve years later: How the "rules" have changed. *Computer-IEEE Computer Magazine*, 45(2):23–29, 2012.
- [8] J. Cantin, M. Lipasti, and J. Smith. The complexity of verifying memory coherence and consistency. *Parallel and Distributed Systems, IEEE Transactions on*, 16(7):663 – 671, july 2005.
- [9] B. Cooper, R. Ramakrishnan, U. Srivastava, A. Silberstein, P. Bohannon, H. Jacobsen, N. Puz, D. Weaver, and R. Yerneni. Pnuts: Yahoo!'s hosted data serving platform. *Proceedings of the VLDB Endowment*, 1(2):1277–1288, 2008.
- [10] T. H. Cormen, C. Stein, R. L. Rivest, and C. E. Leiserson. *Introduction to Algorithms*. MIT Press and McGraw-Hill, 3rd edition, 2009.
- [11] G. DeCandia, D. Hastorun, M. Jampani, G. Kakulapati, A. Lakshman, A. Pilchin, S. Sivasubramanian, P. Voshall, and W. Vogels. Dynamo: amazon's highly available key-value store. In *ACM SIGOPS Operating Systems Review*, volume 41, pages 205–220. ACM, 2007.
- [12] P. Gibbons and E. Korach. Testing shared memories. *SIAM J. Comput.*, 26(4):1208–1244, 1997.
- [13] S. Gilbert and N. Lynch. Brewer's conjecture and the feasibility of consistent, available, partition-tolerant web services. *SIGACT News*, 33(2):51–59, June 2002.
- [14] S. Gilbert and N. Lynch. Perspectives on the cap theorem. *Computer-IEEE Computer Magazine*, (2):30–36, 2012.
- [15] W. Golab, X. Li, and M. Shah. Analyzing consistency properties for fun and profit. In *Proceedings of the 30th annual ACM SIGACT-SIGOPS Symposium on Principles of Distributed Computing*, pages 197–206. ACM, 2011.

- [16] S. Haldar and K. Vidyasankar. On specification of read/write shared variables. *J. ACM*, 54(6), Dec. 2007.
- [17] S. Hangal, D. Vahia, C. Manovit, and J.-Y. J. Lu. Tsotool: A program for verifying memory systems using the memory consistency model. In *Proceedings of the 31st annual international symposium on Computer architecture*, ISCA '04, pages 114–, Washington, DC, USA, 2004. IEEE Computer Society.
- [18] M. P. Herlihy and J. M. Wing. Linearizability: a correctness condition for concurrent objects. *ACM Trans. Program. Lang. Syst.*, 12(3):463–492, July 1990.
- [19] D. E. Knuth. *The art of computer programming, volume 1 (3rd ed.): fundamental algorithms*. Addison Wesley Longman Publishing Co., Inc., Redwood City, CA, USA, 1997.
- [20] L. Lamport. Time, clocks, and the ordering of events in a distributed system. *Commun. ACM*, 21(7):558–565, July 1978.
- [21] L. Lamport. How to make a multiprocessor computer that correctly executes multiprocess programs. *Computers, IEEE Transactions on*, C-28(9):690–691, sept. 1979.
- [22] L. Richard J. and S. Jonathan S. Pram: a scalable shared memory. Technical report, Department of Computer Science, Sept. 1988.
- [23] A. Roy, S. Zeisset, C. Fleckenstein, and J. Huang. Fast and generalized polynomial time memory consistency verification. In *Computer Aided Verification*, pages 503–516. Springer, 2006.
- [24] R. Steinke and G. Nutt. A unified theory of shared memory consistency. *Journal of the ACM (JACM)*, 51(5):800–849, 2004.
- [25] W. Vogels. Eventually consistent. *Commun. ACM*, 52(1):40–44, Jan. 2009.